

3212-7000 Series


Network Video Recorder



3212-7000 Front

Key Features

- Designed for use with the 3212-2000 Thermal Imaging Radiometric Detection Camera
- 3TB and 6TB storage models
- 1 RJ45 10M/100M network interface
- Integrated 4 port 10M/100M PoE network switch
- Simultaneous HDMI and VGA Output

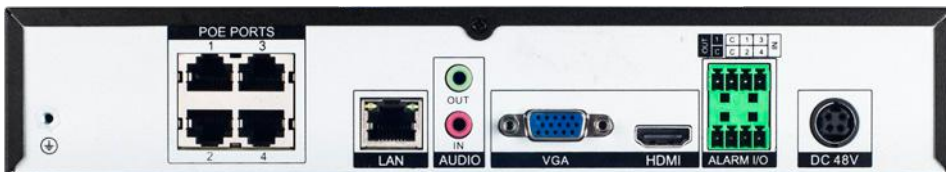

3212-7000 Rear

The CoHuHD Costar 3212-7000 is an adaptive recoding appliance designed to work with the 3212-2000 Thermal Imaging Radiometric Detection Camera. This network recording appliance is designed to work with up to 4 thermographic cameras.

Offered in a 3TB and 6TB option the flexible storage options will allow you to store as much or a little footage as you desire. The integrated PoE switch allows for a quick, simple, and effortless installation between the camera and the recording appliance.



youtube.com/CoHuHD
linkedin.com/company/CoHuHD
twitter.com/CoHuHD
facebook.com/CoHuHD
CohuHD.com

©CohuHD Costar™, LLC reserves the right to change specifications without notice

(858) 391-1800

3212-7000 Series

Network Video Recorder



VIDEO OUTPUT

Interface	1 HDMI, 1 VGA
HDMI Output	3840×2160, 1920×1080, 1440×900, 1280×1024
VGA Output	1920×1080, 1280×1024, 1280×720
Multi-Screen Display	Mirrored displays with up to 4 video panes

RECORDING

Record Mode	Manual, Schedule (Regular, Continuous), Motion Detection, Video Loss, Camera Tamper, Alarm in.
Trigger Events	Motion Detection, Video Loss, Alarm in

VIDEO DETECTION AND ALARM

Trigger Events	Recording, Buzzer, Push message, Pop up message.
Video Detection	Motion Detection, Video Loss, Camera Tamper

PLAYBACK AND BACKUP

Sync Playback	4/1
Search Mode	Time /Date, Alarm, Picture grid, Event
Backup Mode	USB Device

NETWORK

Interface	1 RJ-45 port (10/100Mbps)
PoE Interface	4 ports (IEEE 802.3af), 40W
Network Function	HTTP, HTTPS, TCP/IP, IPv4, UPnP, UDP, RTSP, SMTP, NTP, DNS, DHCP, P2P, IP Filter, DDNS, 802.1X, SNMP
Remote Users	9 users
Interoperability	ONVIF, SDK, CGI

STORAGE

Internal HDD	1 SATA HDD, up to 6TB
--------------	-----------------------

INTERFACE

Audio I/O	1 Input, 1 Output
Alarm Input	4 Inputs
Alarm Output	1 Output
USB	2 ports (USB 2.0)

ELECTRICAL

Power Supply	48VDC/1.25A
Power Consumption	< 5W (without HDD)

MECHANICAL

Dimensions	255(W) × 235(D) × 47.5(H)mm 10(W) × 9.25(D) × 1.87(H)in.
Net Weight	3.4lbs. (1.54kg)

ENVIRONMENTAL

Operating Temp.	-10°C ~ 50°C (14°F ~ 122°F)
Storage Conditions	Less than 90% RH

CERTIFICATIONS

CE, FCC


ORDERING INFORMATION

3212-7003 3TB NVR with Integrated PoE Switch

3212-7006 6TB NVR with Integrated PoE Switch

3212-2000 DIMENSIONS

Dimension	3212-7000	
	Inches	mm
A	10	255
B	9.25	235
C	1.87	47.5

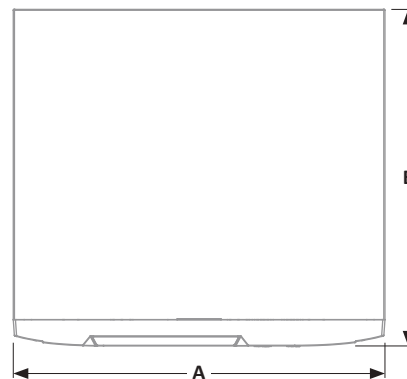

youtube.com/CohuHD
linkedin.com/company/CohuHD
twitter.com/CohuHD
facebook.com/CohuHD
CohuHD.com

©CohuHD Costar™, LLC reserves the right to change specifications without notice

(858) 391-1800

3212-7000.1